

Docket No. 248772US2CRL



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: Timothy David FARNHAM, et al. GAU:

SERIAL NO: 10/777,185

EXAMINER:

FILED: February 13, 2004

FOR: METHODS OF CONTROLLING TRANSMISSION POWER LEVELS IN AIR
INTERFACE CHANNELS

SUBMISSION NOTICE REGARDING PRIORITY DOCUMENT(S)

COMMISSIONER FOR PATENTS
ALEXANDRIA, VIRGINIA 22313

SIR:

Certified copies of the Convention Application(s) corresponding to the above-captioned matter:


☒ are submitted herewith

☐ were filed in prior application filed

☐ were submitted to the International Bureau in PCT Application Number _____
Receipt of the certified copies by the International Bureau in a timely manner under PCT Rule
17.1(a) has been acknowledged as evidenced by the attached PCT/IB/304.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.

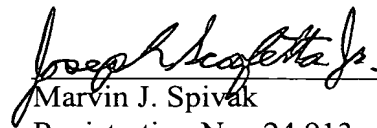

Marvin J. Spivak
Registration No. 24,913

Joseph Scafetta, Jr.
Registration No. 26,803

Customer Number

22850

Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 11/04)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed


Dated 16 February 2004

CERTIFIED COPY OF
PRIORITY DOCUMENT

Patents Form 7/77

Patents Act 1977
(Rule 15)

The
Patent
Office

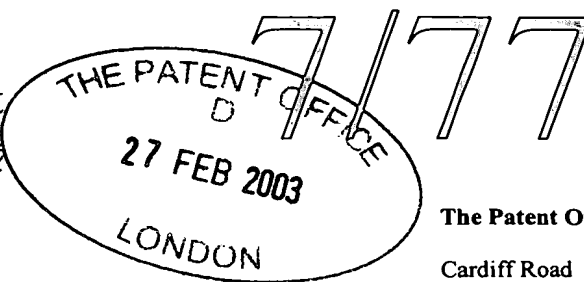

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

**Statement of inventorship and of
right to grant of a patent**

1. Your reference

GBP85915

2. Patent application number
(if you know it)

0304497.1

3. Full name of the or of each applicant

Toshiba Research Europe Limited,

4. Title of the invention

Improvements in Radio Data Transmission

5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent

By virtue of employment

6. How many, if any, additional Patents Forms
7/77 are attached to this form?
(see note (c))

7.

I/We believe that the person(s) named over the page
(and on any extra copies of this form) is/are the inventor(s) of the
invention which the above patent application relates to.

Signature

Date

M+C

27 February 2003

8. Name and daytime telephone number of
person to contact in the United Kingdom

GB Patent Filing section

0207 400 3000

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the
inventors in the boxes and underline the surnames

Farnham, Timothy David
c/o Toshiba Research Europe Limited
32 Queen Square
Bristol BS1 4ND

8306011001

Gamboa, Gregory
c/o Toshiba Research Europe Limited
32 Queen Square
Bristol BS1 4ND

Patents ADP number (if you know it):

8575987001

Reminder
Have you signed the form?

Patents Form 1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE
27 FEB 2003
LONDON

The
Patent
Office

28FEB03 E768403-10 003312
LP01/7700 0.00-0304497.1

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference **GBP85915**

2. Patent application number
(The Patent Office will fill in this part)

0304497.1

3 Full name, address and postcode of the or of
each applicant (underline all surnames)

Toshiba Research Europe Limited,
32 Queen Square
Bristol BS1 4ND
United Kingdom

Patents ADP number (if you know it)

8117095001

If the applicant is a corporate body, give the
country/state of its incorporation

United Kingdom

4. Title of the invention **Improvements in Radio Data Transmission**

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Marks & Clerk
57 - 60 Lincolns Inn fields
London WC2A 3LS

Patents ADP number (if you know it)

18001 ✓

6. If you are declaring priority from one or more
earlier patent applications, give the country and
the date of filing of the or of each of these
earlier applications and (if you know it) the or each
application number

Country

Priority application No
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and the filing date of
the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent
required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	16
Claim(s)	4
Abstract	1
Drawing(s)	8

g

8

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents	/
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	1 /
Request for preliminary examination and search (Patents Form 9/77)	1 /
Request for substantive examination (Patents Form 10/77)	1
Any other documents (please specify)	

11. I/We request the grant of a patent on the basis of this application.

Signature MHC

Date: 27 February 2003

12. Name and daytime telephone number of person to contact in the United Kingdom
- GB Patent Filings
0207 400 3000

METHOD OF IMPROVING THE PERFORMANCE OF DIGITAL DATA TRANSMISSION OVER RADIO

Field of the Invention

The present invention relates to wireless communications, and in particular although not exclusively, to networks of indoor collocated or overlapping wireless coverage areas especially those intended for operation in unlicensed spectrum such as the Industrial Scientific and Medical (ISM) bands.

Background of the Invention

Collocated wireless coverage areas using different channels can still interfere with each other, adjacent channel suppression depends largely on the receiver implementation and transmitted spectral mask. Similarly, overlapping or adjacent wireless LAN coverage areas using uncoordinated spread spectrum mechanisms such as direct sequence or frequency hop spread spectrum also "intentionally" interfere with each other to a certain extent when the same or adjacent channels are used at the same time. Typically these channels are defined by frequency, (as used in frequency division multiple access) time slot (time division multiple access), code (code division multiple access) or a combination. The level of interference on a given channel will depend on many factors including the signal strength of the wanted and interfering signals which in turn will depend on their transmission power level and the signal propagation environment, for example whether there is likely to be a strong multipath fading of the wanted or interfering signal as is typically difficult to predict in indoor environments.

The level of interference which is acceptable can also depend on what type of data is being transmitted. For example non-real time data such as email can be re-transmitted if not received correctly. However other types of real time data such as video base layer

frames are more critical and sensitive to delays such as re-transmissions and therefore require a higher quality channel to deliver them in good time.

“Dynamic Reconfiguration and Efficient Resource Allocation for Indoor Broadband Wireless Networks” by Tim Farnham and Brian Foxon, Universal Personal Communications, 1998, ICUPC '98, IEEE 1998 International Conference, Vol 1, 1998, pages 53-57; describes an indoor radio access network having clusters of access points or base stations that use a combination of time division and frequency division multiple access mechanisms. The network sets different interference thresholds for type 1 (video) and type 2 (data) traffic, the type 1 threshold being lower as video is delay sensitive which means it needs to be sent first and accurately to avoid the need for re-transmission. The network switches between different channels when too many type 1 packets are waiting for transmission through an existing channel because its interference level is too high. The trigger for a channel change is based on the average buffer occupancy and error rate over time.

Summary of the Invention

In general terms, the present invention provides a method of controlling a wireless network having at least one base station and one or more mobile stations each containing one or more radio transceivers, in which the power levels of channels allocated between a base station and a mobile station are dynamically varied in order to reduce the interference level on channels which are carrying traffic with a high quality of service level (QoS) requirement.

By controlling channel power levels, the network can optimise conditions for channels transmitting traffic (such as packets) requiring a high QoS. This may involve reducing the power levels on channels carrying traffic with a lower QoS requirement, which may, but need not, result in higher interference levels or larger delays for that lower QoS traffic. This enables more critical or sensitive data to be transmitted with greater accuracy, by providing a low interference channel when required, but without building into the network the need to maintain these low interference channels the whole time

which would reduce capacity. Less critical or sensitive data can be transmitted using higher interference or lower QoS channels, thereby increasing the capacity of the network. If need be this data can be retransmitted as it is less sensitive to delays.

In particular, in one aspect the present invention provides a method of controlling the transmission power associated with an air interface channel, the method comprising: determining a quality of service measure for a signal to be transmitted on a second air interface channel; determining an interference measure corresponding to the interference on said second air interface channel which will be caused by transmissions on said first air interface channel; requesting the changing of the transmission power associated with the first air interface channel when the signal is to be transmitted on the second air interface channel, when the quality of service measure is above a predetermined value and when the interference measure is above a predetermined value for said quality of service value.

Preferably the transmission power associated with the first air interface channel is changed when the signal is to be transmitted on the second air interface channel.

Alternatively, if this is not possible, the transmission associated with the first air interface channel may be postponed or suppressed when the signal is to be transmitted on the second air interface channel.

The quality of service measure and the interference measure determinations may be based on the prediction of likely quality of service requirements and interference levels.

Determining the interference measure may determining whether the signal to be transmitted or received over the first air interface channel will occur within the same time frame as transmissions on the second air interface channel.

The air interface channels are associated with different air interface technologies, such as WLAN IEEE802.11 standards, or Bluetooth for PANs.

In another aspect the present invention provides a method of allocating power levels to transceivers in a wireless network having a base station and two or more mobile stations using said transceivers; the method comprising: determining whether a signal to be transmitted over a first said transceiver has a high QoS indicator; determining whether any of said other transceivers will cause a predetermined level of interference to occur on said first transceiver when said signal is to be transmitted; instructing the reduction of the transmission power levels of one or more said other transceivers when said traffic signal is transmitted over said first transceiver.

Preferably the transceivers are collocated.

In yet another aspect the present invention provides a method of allocating power levels to transceivers in a wireless network having a base station and two or more mobile stations using said transceivers; the method comprising: allocating one said transceiver for high quality of service signals; instructing another said transceiver to reduce its transmission power level if it would otherwise interfere with a high quality of service signal by above a predetermined amount.

In other aspects the invention provides corresponding apparatus for implementing these methods, as well as software or computer or processor code which is capable of controlling a computer or processor to carry out these methods.

Brief Description of the Drawings

In order to better understand the invention, embodiments will now be described with reference to the following drawings, by way of example only and without intending to be limiting, in which:

Figure 1 is a schematic of a wireless network;

Figure 2a is a schematic of a base station for the network of figure 1;

Figure 2b is a schematic of a mobile station for the network of figure 1;

Figure 3 is a flow chart showing a method of operating the base or mobile stations of figure 2;

Figure 4a is a schematic of the transmission management arrangement for the base station of figure 2a;

Figure 4b is a schematic of the transmission management arrangement for the base station of figure 2b;

Figure 5 is a graph of the performance of a network of collocated BluetoothTM piconets;

Figure 6 is a schematic of a BluetoothTM access point; and

Figure 7 is a schematic of a device supporting both BluetoothTM and IEEE802.11b protocols.

Detailed Description

Figure 1 shows an embodiment comprising a wireless network having one or more base stations or hubs 2 wirelessly coupled to a number of mobile stations 1. The network is arranged into one or more coverage areas 5. These coverage areas 5 might be PAN's (Personal Area Network) each comprising a number of collocated Bluetooth piconets each servicing a different mobile station 1 within the PAN. Alternatively the network might be a WLAN (Wireless Local Area Network) comprising adjacent or overlapping IEEE802.11 coverage areas 5 or a combination of PAN and WLAN. Wireless signals 3 couple each mobile station 1 to its corresponding base station 2. These signals 3 may also travel into adjacent areas 5 causing (especially) co-channel and adjacent channel interference (shown generally as 4).

Figure 2a is a schematic of a base station or access point 2a providing four air interface processing chains (shown generally as 16a, 16b, 16c, 16d) for communicating with mobile stations 1 within its coverage area 5. Each chain 16a – 16d has associated transmission and/or reception functions for a radio access technology (such as radio signal modulation and demodulation, synchronisation, start of frame detection, frequency hopping, medium access control, link management, packet reception and transmission) or transceivers 14a – 14d, each having a transmission power control function 15a – 15d which controls the level of transmission power for that transceiver's signal 3 and synthesisers 17a, 17b, 17c, 17d for setting the transmit and receive frequency (or channel) of the transceiver 14.

The base station 2 may also comprise a multiplexer/demultiplexer 11 for interfacing between the separate air interface processing chains 16 and a combined data link 10 to the outside world; for example phone line, Ethernet LAN or other base stations in the case of a WLAN.

Each air interface processing chain 16 is also associated with a transmission management function (TM) 12a – 12d, which performs intelligent cooperative power management operations for the corresponding transceivers 14a, 14b, 14c, 14d and controls the transmission power levels of each transceiver 14 in the coverage area (eg Bluetooth piconet 5) through the corresponding power control functions 15, which can override air interface specific power control algorithms implemented within the transceivers 14. The detailed functionality required within the transmission management function 12 to support this power management can be seen with reference to figures 3 and 4.

The transmission management (TM) function 12a for a corresponding transceiver 14a first determines whether the next (or subsequent) packet(s) to be transmitted has a high Quality of Service requirement (QoS). This is indicated by a predetermined field within the packet or by analysing the packet type and size or by fixed priorities assigned to the different transceivers 14 and the method of packet classification implemented within the demultiplexer. The indication may be binary, that is either high (critical) or low (best effort); or there may be various levels of QoS requiring different handling.

If the next or subsequent packet(s) requires a high QoS (i.e. higher than can be achieved without intervention), then functionality within the TM function 12a determines estimates of the level of interference on the channel 3 that the transceiver 14a will be transmitting or receiving on for its next (or a predetermined) transmission slot (or other transmission period over which the packet will be transmitted) by interrogating the other TM functions 12b, 12c, 12d about their next transmission slots (in particular the frequency or channel and transmit / receive timing). By determining whether the transceivers 14b, 14c or 14d will be transmitting in the next slot, the TM function 12a can estimate the interference this is likely to cause in its receiver (14ar). This is also the level of interference that is likely to be observed at the receiving mobiles 1 of the transmission from the transmitter 14at (ignoring frequency selective fading and assuming similar or in fact the same antenna patterns). However, the interference could also be estimated separately for the receiving modules. This is described in more detail later.

The present TM function 12a can also be configured to interrogate the mobile stations 1 of its own coverage area 5 (eg piconet) for their intended transmissions over the next transmission slot. It is also possible that the TM function can estimate which mobiles are (or are likely) to be transmitting in the next time period. For example by analysing the transmission from the base station to the mobile or previous transmissions from the mobile to the base station.

In the case of a WLAN, in addition to determining whether the other 14b, 14c, 14d transceivers of the present base station 2a will be transmitting when present transceiver 14a intends to transmit or receive the high QoS packet(s), the TM function 12a can also determine whether radio transceivers in adjacent areas 5 will be transmitting during the next slot. It does this by interrogating the other base stations 2b, etc associated with those other areas 5 over the data link 10, which also provides the traffic and other control signals. The present TM function 12a may just interrogate the base stations 2a, etc of adjacent areas 5, or it may interrogate base stations 2 which are perhaps two or more areas 5 distant from the present base station 2a, depending on the signal

propagation environment. Similarly, the mobile stations 1 communicating with these other base stations 2 may also be interrogated, or their likely transmissions estimated.

From all this information, or a sub-set of it, the TM function 12a is able to estimate the interference which will or is likely to occur in its associated channel of the transceiver 14a and the mobiles connected to this transceiver over the next transmission / reception slot. If this is above a predetermined threshold for a high QoS packet, then the TM function 12a selects an interfering transceiver 14b (or transceivers) and requests that the power on this be reduced by a predetermined amount for the next transmission slot in order to reduce the interference on the chains 16a associated with the present transceiver 14a (and the mobiles connected via 14a) which is to transmit (or receive) the high QoS packet(s). Where there are a series of incoming or outgoing high QoS packets for transceiver 14a, the other transceivers 14b, 14c, 14d may simply be requested to reduce transmission power for the whole period of this series.

The transceiver 14b that is requested to reduce power receives the "reduce Tx power" request and determines whether the packet can still be transmitted at reduced power (with increased probability of packet loss). If not, then the packet is suppressed until the next transmission opportunity. If there is conflict due to too many high priority packets that can not be suppressed that are being scheduled simultaneously, the TM can make a request to change channels, which may or may not be possible depending on the radio access technology. Otherwise the associated power control function 15b is instructed to reduce power by the requested amount for the next transmission slot (or period).

Whilst this method has been described in relation to the next transmission slot for ease of explanation, other arrangements could be used for example using transmission (and reception) sequences (as described in "An asynchronous time division multiplexing-multiple access protocol for indoor wireless multi-service networks", by T Farnham, Universal Personal Communications 1997, ICUPC '97 IEEE 6th International Conference, 12-16 Oct 1997).

Figure 2b is a schematic of a mobile station 1 having one air interface processing chain 16ma for communicating with the base station 2a of figure 2a. The mobile station 1 has

an associated transmission and/or reception function or transceiver 14ma which has a transmission power control function 15ma which controls the level of transmission power for that transceiver 14ma and a synthesizer function 17ma that sets the transmit and receive frequency (or channel) of the transceiver.. A transmission from the mobile to the base station can be received by any one of the transceivers 14a, 14b, 14c and 14d in the base station. Likewise the transmission from the base station to the mobile can be from any transceiver 14a, 14b, 14c and 14d. However, the channels (frequency) that transceivers 14a and 14ma are tuned to (via the synthesisers 17a and 17ma) and air interface technology (modulation and coding schemes etc.) used by the transceivers 14a and 14ma must be the same for the transmission to be successfully received.

The mobile station 1 has a TM function 12ma which can receive requests to raise or lower transmitter power by the base station transceiver (14a). Normally this would be performed with air interface specific power control commands (i.e. directly between 14a and 14ma). Therefore, existing methods can be utilised for communicating power control commands to mobile stations. It could also utilise the same commands in the reverse direction (for requests from the mobile station to the base station transceiver 14). However, to convey request covering longer time periods with more advanced power management commands (such as with priority and QoS information) would require separate signalling methods between TM entities 12a and 12ma (for example transmission sequences can be multicast or broadcast using user data or control channels).

The mobile may also contain more than one transceiver and in this case it could be implemented in an identical manner to the base station 2.

Figures 4a and 4b are schematics showing in more detail the TM functions 12 for the base stations 2 and mobile stations 1 respectively. For ease of explanation, reference is only made to other TM's and transceivers' existing within a single coverage area 5, that is by a single base station 2 and mobile stations 1 within the coverage area 5, as is typically the case in a PAN. It being understood that this can be expanded to incorporate TM's and transceivers associated with base stations and mobile stations in other

coverage areas 5 such as in a WLAN for example, with the use of appropriate control signals over the network.

Referring to figure 4a and 2a, the TM function 12a of base station 2a is associated with a transceiver 14a used for both reception and transmission, and comprises a first buffer 22 coupled between the demultiplexer 11 and the transmission/reception circuitry (shown as separate transmitter 14at and receiver 14ar functions for ease of explanation). The packet classification performed within the demultiplexer can utilise combinations of source / destination addressing, packet type, flow labels or packet QoS indicators to determine which transceivers to route the packets destined for the mobiles.

The power management functionality can be distributed between transceivers (14a, 14b, 14c and 14d) with one TM 12 per transceiver 14, as shown in figure 2a, alternatively a single TM can be implemented to control all transceivers.. In either case the detailed functionality of the TM is the same as shown in figure 4a.

A scheduling function 24a, controls the transmission packet queue to determine when a packet requiring high QoS is present, and the transmission time this is scheduled to be transmitted. The required QoS is typically given in a predetermined field in each packet, or can be based on packet type, packet size, or destination/source address or packet flow label.

A suppression function 23a either instructs the power control function (15at) within the transceiver to reduce power level of a transmission or suspends the intended transmission of a packet until the next transmission opportunity (following the suppression period). The suppression can be achieved in a number of ways. For instance by reducing power level to in effect zero, which is likely to result in lost packets or higher layer retransmissions. Alternatively, the transceiver could be instructed to enter a sleep mode for a predetermined length of time.

A performance and traffic monitoring function 27a determines performance parameters associated with the receiver 14ar, for example measurements can be made of signal strength, bit error rate, packet latency, packet failure or retransmission rate or any

combination of these. The monitoring function (27a) can also observe traffic patterns or levels of activity, which are not necessary for normal operation, but can be used to make predictions about likely levels of interference by analysing packet arrivals and packet sizes. These various measurements are assessed by a performance assessment function 25a which monitors the affect of interference from other transceivers over time. This information can be used by the scheduler 24a to determine whether a packet with high QoS can be sent given transceiver 14a interference levels.

A performance prediction function 26a estimates the transceivers (14a) likely interference levels for upcoming transmission slots based on output from the performance assessment function 25a as well as other data from other TM functions. This other data might include future transmission options (taking into account frequency hop and channel offset patterns transmission deadlines and permissible power levels). It may even include information on what QoS level (or priority) the packets they will be transmitting in particular slots are intended to have.

From these predictions, the scheduler 24a determines whether a high QoS packet can be transmitted during a predetermined transmission slot based on the predicted interference level for the channel at that time. If the interference level is too high, the scheduler 24a selects a transceiver 14b (or transceivers) to reduce power and issues a corresponding request via the suppression function 23b to for that transceiver (14b). The request may include the priority level of the packet, the source(s) that needs to be suppressed, the length of time that suppression is required, and the level of suppression (for example in dB). If the scheduler's request is successful then it transmits the high QoS packet at the allotted transmission time slot. If the scheduler's 24a request is not successful., it either selects another transceiver 14c to reduce power (which it has determined will cause some interference and if this would satisfy the requirements) and performs another request, or delays the high QoS packet to another time slot. Alternatively the TM can be configured to instruct a change of channel (i.e. carrier frequency) which may or may not be possible depending on the air interface technology. A prediction is then made about the likely interference for that time slot and if necessary a reduce power message(s) is sent to a selected transceiver(s).

The scheduler 24a also receives requests to suppress a particular transmission slots from the associated suppression function 23 when a request to suppress (or reduce transmit power) from another transceiver (16b) is successful (i.e. the suppression function has accepted to reduce power or suppress the transmission).

The receiving part 14ar of the transceiver 14a is coupled to the multiplexer 11 of the base station 2a, which forwards incoming packets to the appropriate destination.

Figure 4b shows a schematic of the TM function 12am for a mobile station 1 which is analogous to that of the base station, except that control signals such as reduce power requests are all sent over a wireless link.

A given PAN or WLAN (or combination) may incorporate both base station(s) and mobile stations implementing these functions, alternatively only one of these may use this arrangement.

The above described functions may be implemented by software and/or hardware accelerators such as ASIC's or FPGA for example.

An example implementation is described in more detail below. The base station 2 has four collocated transceivers 14a, 14b, 14c and 14d. The first two transceivers supporting the (cck modulated) 802.11b (14a and 14b) air interface and the second two the (frequency hopping fsk modulated) Bluetooth air interface (14c and 14d). In this example the QoS requirements can be met with fixed priority assignment in the order of 16a (being highest priority) to 16d (being lowest priority). Each transceiver has its own power control functionality 15a, 15b, 15c, 15d respectively. For simplicity only one mobile is associated with each transceiver 14a, 14b, 14c and 14d (denoted 1a, 1b, 1c and 1d respectively). The mobile stations can receive TM specific power control commands but cannot perform other more complex power management functions.

The packet classification within the demultiplexer 11 ensures that the packets are routed to the different transceivers (and on to the mobiles 1a, 1b, 1c and 1d) based on destination address and packet type. The specification of the timing of suppression

requires a shared clock of sufficient resolution to provide accurate estimation of when interference will be caused. In this case a clock with resolution of one Bluetooth time slot (625microseconds) is used. Also, the power control method must be precise enough to allow for the different levels of performance required. The transceivers 14 each support 4 power levels (corresponding to approximate transmit power levels of 20dBm, 10dB, 4dBm, 0dBm). The performance assessment and prediction method utilise packet success rate (using packet CRC check) and latency.

When a packet is waiting transmission at the transceiver 14a, the corresponding scheduler function (24a) uses the performance predictor (26a) to discover whether there will be acceptable interference or not, using timing information obtained from the other transceivers scheduling functions (24b, 24c and 24d), frequency channel offset pattern information and the current transceivers performance assessment function (25a), which provides an indication of past performance. If the interference is deemed to be unacceptable (for example if the centre frequency between channels is less than a predetermined amount Δf_{ir}^1) a request is made to the appropriate transceivers suppression functions (23b, 23c and 23d) to suppress transmission by 1 level (i.e. 1 level below that of the 14a transceiver) for the period in which the performance predictor (26a) indicates that interference will be caused. If the separation between channel centre frequencies is less than Δf_{ir}^2 then a request is made to the appropriate transceivers suppression functions (23b, 23c and 23d) to suppress transmission by 2 levels (i.e. 2 levels below that of the 14a transceiver). If the separation between channel centre frequencies is less than Δf_{ir}^3 then a request is made to the appropriate transceivers suppression functions (23b, 23c and 23d) to suppress transmission by 3 levels (i.e. 3 levels below that of the 14a transceiver). If the separation between channel centre frequencies is less than Δf_{ir}^4 then a request is made to the appropriate transceivers suppression functions (23b, 23c and 23d) to suppress transmission by 4 levels (i.e. 4 levels below that of the 14a transceiver).

If the transmit power level of the current transceiver 14a is less than the highest level, the scheduler (24a) can simultaneously request to increase the power level of transceiver

14a (to the power controlling function 15a) while also sending the suppression requests to the other transceivers suppression functions, (23b, 23c and 23d).

Likewise, the reception of a packet at the transceiver 14a is predicted by the monitoring function (27a) observing the traffic pattern. The pattern in this case is a regular group of packets at a fixed interval and so the arrival of the next group of packets is easily predicted. When the next group of packets is expected, the performance monitor function (27a) uses the performance predictor (26a) to discover whether there will be acceptable interference or not, using timing information obtained from the other transceivers scheduling functions (24b, 24c and 24d), frequency channel offset pattern information and the current transceivers performance assessment function (25a), which provides an indication of past performance. In the same way as for packet transmission, if the interference is deemed to be unacceptable (in this case if the centre frequency between channels is less than Δf^1_n) a request is made to the appropriate transceivers suppression functions (23b, 23c and 23d) to suppress transmission by 1 level (i.e. 1 level below that of the 16a transceiver) for the period in which the performance predictor (26a) indicates that interference will be caused. If the separation between channel centre frequencies is less than Δf^2_n then a request is made to the appropriate transceivers suppression functions (23b, 23c and 23d) to suppress transmission by 2 levels (i.e. 2 levels below that of the 14a transceiver). If the separation between channel centre frequencies is less than Δf^3_n then a request is made to the appropriate transceivers suppression functions (23b, 23c and 23d) to suppress transmission by 3 levels (i.e. 3 levels below that of the 16a transceiver). If the separation between channel centre frequencies is less than Δf^4_n then a request is made to the appropriate transceivers suppression functions (23b, 23c and 23d) to suppress transmission by 4 levels (i.e. 4 levels below that of the 16a transceiver).

The same functionality is implemented in the other TM's 12b, 12c and 12d.

In this case frequency offset has been used as the main decision criteria. Alternatively, in fixed frequency systems for example, the modulation scheme and/or antenna direction (in the case of directional antennas) could be used.

The embodiment is applicable to any radio networking protocol, for example Bluetooth for a PAN arrangement, and HiperLan or IEEE802.11 for a WLAN arrangement. The channels may be defined by any known means, for example by frequency, code, time slot or spatial multiplexing. It could also be applied in device-to-device communications where two or more channels are used simultaneously.

The embodiment efficiently supports different levels of quality of service with bursty traffic characteristics. This enables more efficient utilisation of radio resources and improves support for different services and applications. Figure 5 shows the performance of Bluetooth with collocated piconets. The packet failure rate could easily be unacceptable for many applications. Therefore suppression of interfering piconets when interference is unacceptable makes this traffic supportable (in this example the packet failure rate would fall from over 10% with 3 collocated piconets to around 3%). Other services can easily sustain 10% packet failure rate with standard retransmission mechanisms.

Figure 6 shows a Bluetooth access point implementation. In this arrangement the piconets are overlapping in physical space, each providing a single channel to wirelessly couple a single mobile station to the access point.

One or more of these piconets is designated to support higher QoS than the others, for example to carry MPEG4 base layer frames. Expected interference is thus measured or predicted with respect to the dedicated high QoS piconets, the other piconets having their power levels suppressed as required.

Figure 7 shows a device which supports both Bluetooth and IEEE802.11 protocols. Here Bluetooth might support a voice call whereas 802.11 supports data transfer. The QoS of the Bluetooth connection is more important than the 802.11 connection, as packet retransmission is not a good option for a voice call. Therefore the performance assessor suppresses the 802.11 transmissions while the Bluetooth system is receiving or transmitting. In this case the performance prediction is simply based on frequency separation between the Bluetooth and 802.11 systems.

The invention has been described with respect to embodiments thereof. Alterations and modifications as would be obvious to those skilled in the art are intended to be incorporated within the scope hereof.

CLAIMS

1. A method of controlling the transmission power associated with an air interface channel, the method comprising:

determining a quality of service measure for a signal to be transmitted on a second air interface channel;

determining an interference measure corresponding to the interference on said second air interface channel which will be caused by transmissions on said first air interface channel;

requesting the changing of the transmission power associated with the first air interface channel when the signal is to be transmitted on the second air interface channel, when the quality of service measure is above a predetermined value and when the interference measure is above a predetermined value for said quality of service value.

2. A method as claimed in claim 1 further comprising changing the transmission power associated with the first air interface channel when the signal is to be transmitted on the second air interface channel.

3. A method as claimed in claim 1 further comprising postponing or suppressing the transmission associated with the first air interface channel when the signal is to be transmitted on the second air interface channel.

4. A method as claimed in any one preceding claim wherein the quality of service measure and the interference measure determinations are based on the prediction of likely quality of service requirements and interference levels.

5. A method as claimed in any one preceding claim wherein determining the interference measure comprises determining whether the signal to be transmitted or received over the first air interface channel will occur within the same time frame as transmissions on the second air interface channel.

6. A method as claimed in any one preceding claim wherein the air interface channels are associated with different air interface technologies.

7. A method of allocating power levels to transceivers in a wireless network having a base station and two or more mobile stations using said transceivers; the method comprising:

determining whether a signal to be transmitted over a first said transceiver has a high QoS indicator;

determining whether any of said other transceivers will cause a predetermined level of interference to occur on said first transceiver when said signal is to be transmitted;

instructing the reduction of the transmission power levels of one or more said other transceivers when said traffic signal is transmitted over said first transceiver.

8. A method as claim in claim 7 wherein the transceivers are collocated.

9. A method of allocating power levels to transceivers in a wireless network having a base station and two or more mobile stations using said transceivers; the method comprising:

allocating one said transceiver for high quality of service signals;

instructing another said transceiver to reduce its transmission power level if it would otherwise interfere with a high quality of service signal by above a predetermined amount.

10. An apparatus for controlling the transmission power associated with an air interface channel, and which comprises:

means for determining a quality of service measure for a signal to be transmitted on a second air interface channel;

means for determining an interference measure corresponding to the interference on said second air interface channel which will be caused by transmissions on said first air interface channel;

means for requesting the changing of the transmission power associated with the first air interface channel when the signal is to be transmitted on the second air interface channel, when the quality of service measure is above a predetermined value and when the interference measure is above a predetermined value for said quality of service value.

11. An apparatus as claimed in claim 10 further comprising means for changing the transmission power associated with the first air interface channel when the signal is to be transmitted on the second air interface channel.

12. An apparatus as claimed in claim 10 further comprising means for postponing or suppressing the transmission associated with the first air interface channel when the signal is to be transmitted on the second air interface channel.

13. An apparatus as claimed in any one of claims 10 to 12 wherein the quality of service measure and the interference measure determinations are based on the prediction of likely quality of service requirements and interference levels.

14. An apparatus as claimed in any one of claims 10 to 13 wherein the means for determining the interference measure comprises means for determining whether the signal to be transmitted or received over the first air interface channel will occur within the same time frame as transmissions on the second air interface channel.

15. An apparatus as claimed in any one of claims 10 to 14 wherein the air interface channels are associated with different air interface technologies.

16. An apparatus for allocating power levels to transceivers in a wireless network having a base station and two or more mobile stations using said transceivers; the apparatus comprising:

means for determining whether a signal to be transmitted over a first said transceiver has a high QoS indicator;

means for determining whether any of said other transceivers will cause a predetermined level of interference to occur on said first transceiver when said signal is to be transmitted;

means for instructing the reduction of the transmission power levels of one or more said other transceivers when said traffic signal is transmitted over said first transceiver.

17. An apparatus as claim in claim 16 wherein the transceivers are collocated.

18. An apparatus for allocating power levels to transceivers in a wireless network having a base station and two or more mobile stations using said transceivers; the apparatus comprising:

means for allocating one said transceiver for high quality of service signals;

means for instructing another said transceiver to reduce its transmission power level if it would otherwise interfere with a high quality of service signal by above a predetermined amount.

19. A carrier medium carrying processor readable code for controlling a processor to carry out the method according to any one of claims 1 to 9.

ABSTRACT

The present invention relates to wireless communications, and in particular although not exclusively, to networks of indoor collocated or overlapping wireless coverage areas especially those intended for operation in unlicensed spectrum such as the Industrial Scientific and Medical (ISM) bands. The present invention provides a method of controlling the transmission power associated with an air interface channel, the method comprising: determining a quality of service measure for a signal to be transmitted on a second air interface channel; determining an interference measure corresponding to the interference on said second air interface channel which will be caused by transmissions on said first air interface channel; requesting the changing of the transmission power associated with the first air interface channel when the signal is to be transmitted on the second air interface channel, when the quality of service measure is above a predetermined value and when the interference measure is above a predetermined value for said quality of service value.



1
2
3

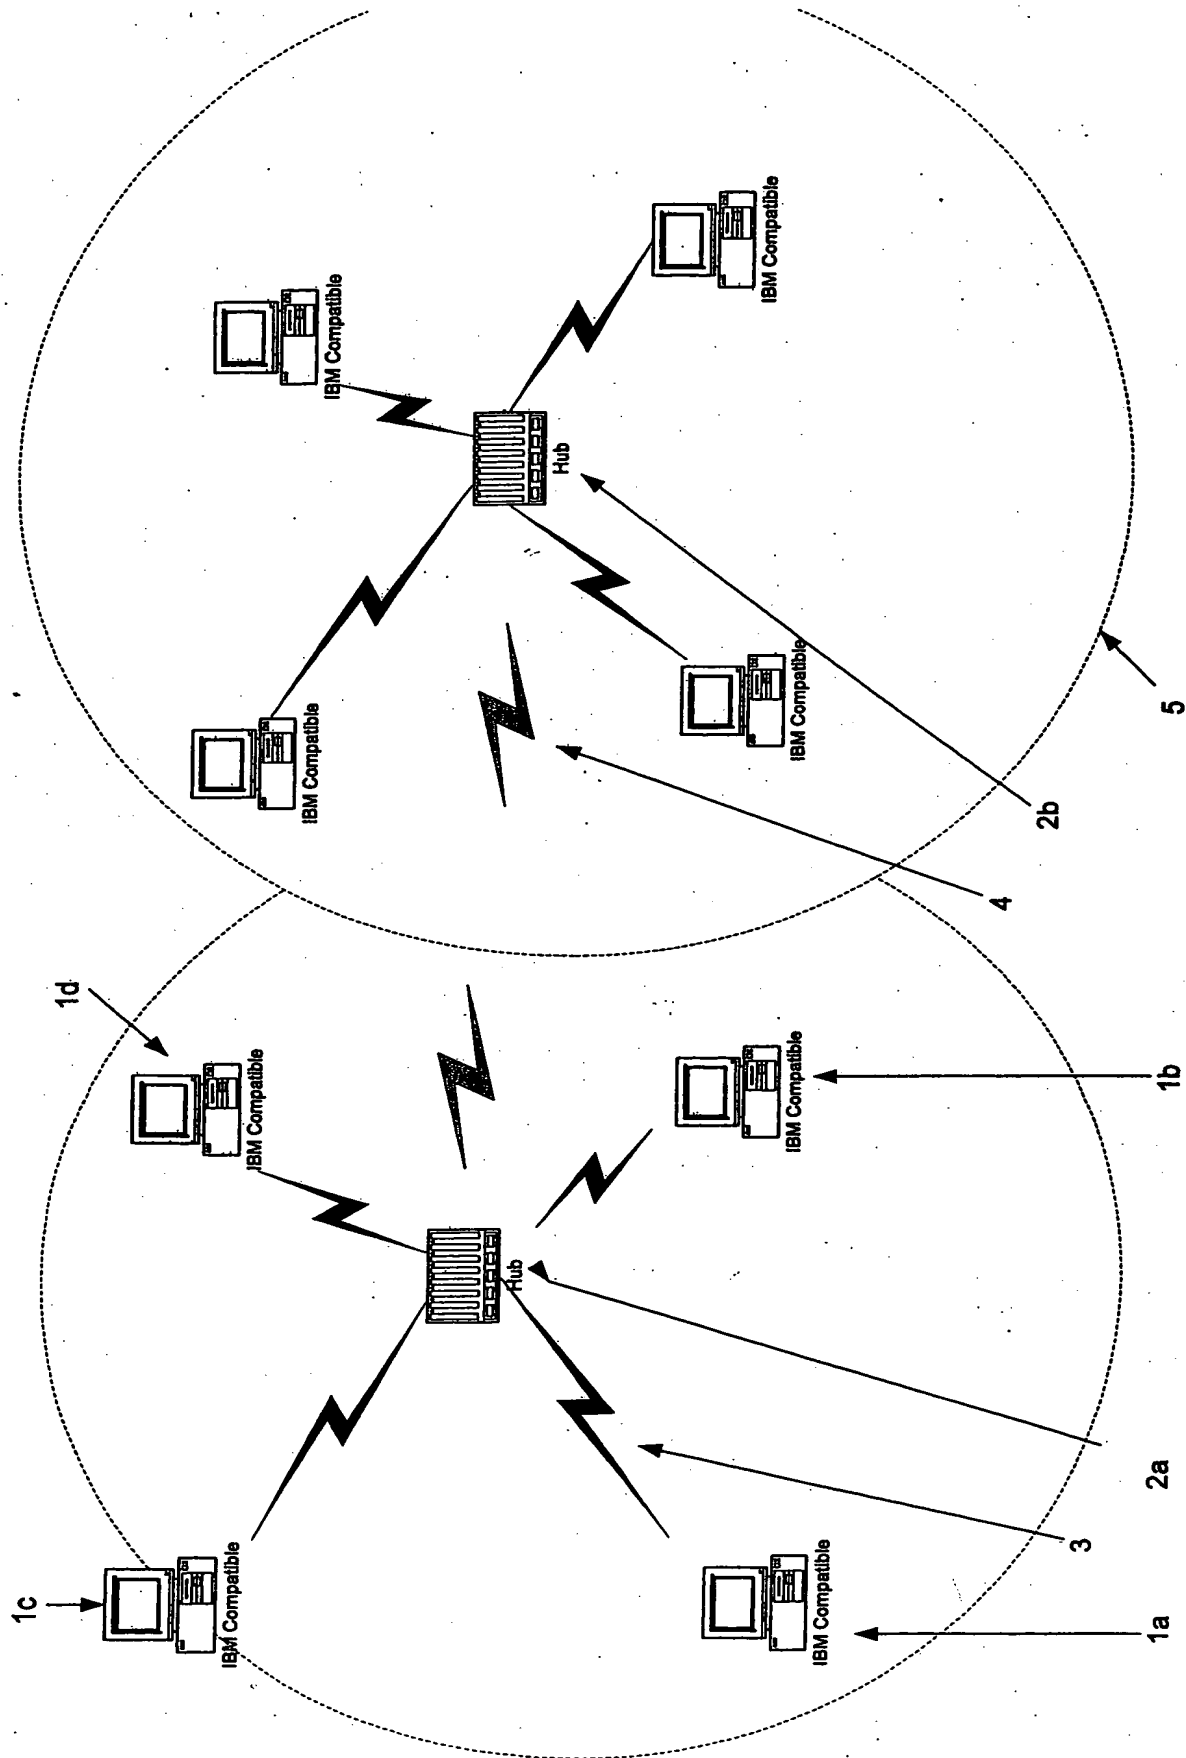


Fig 1



•
•
•

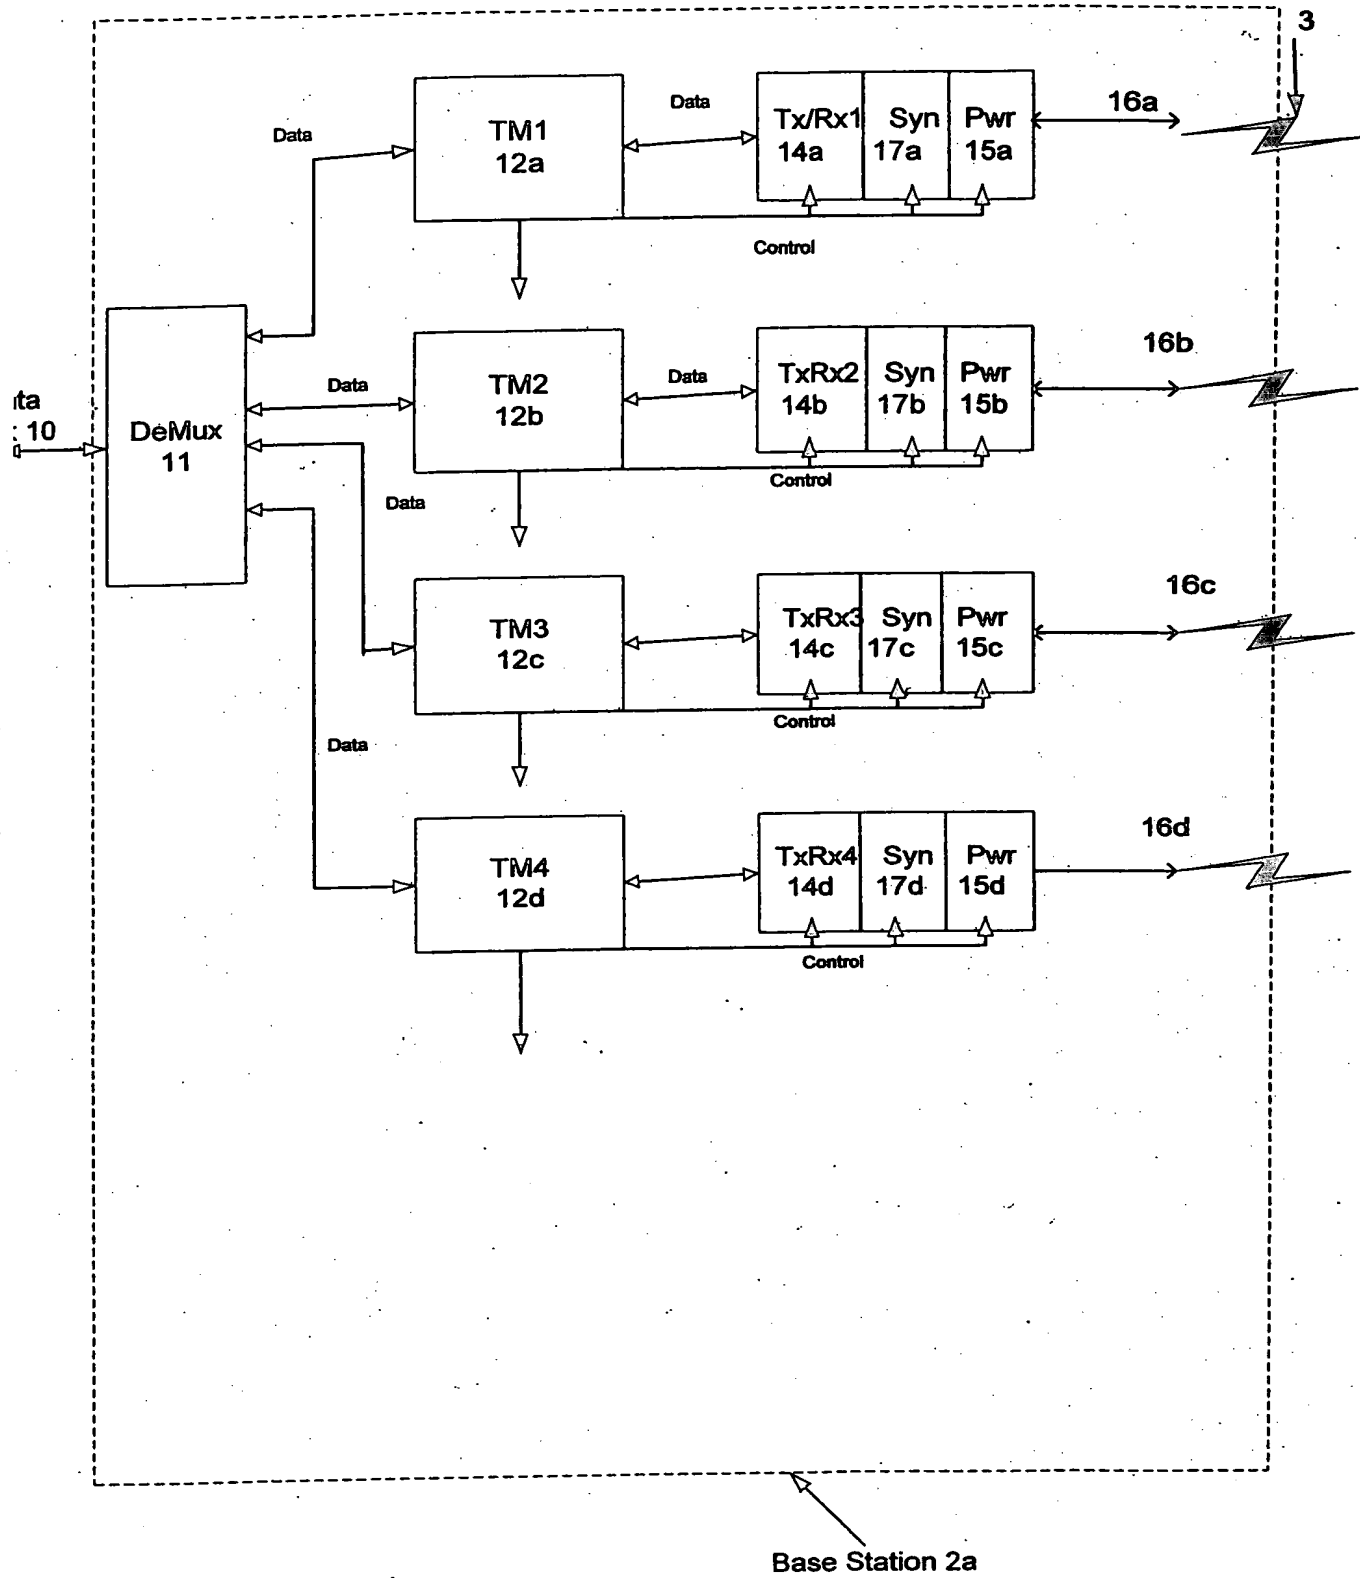


Fig 2a



1
2
3

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

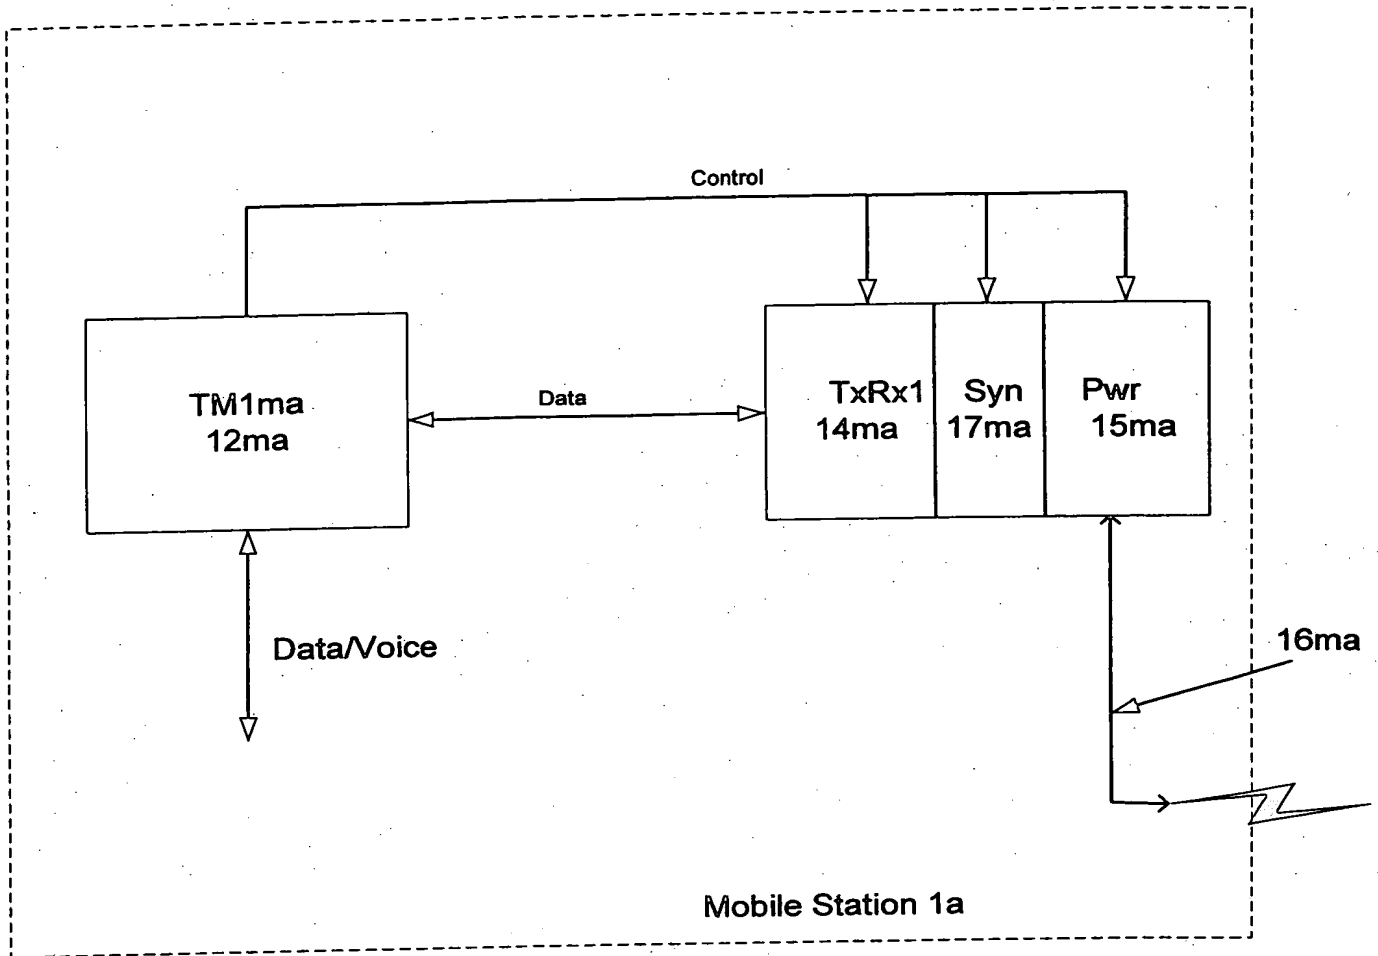


Fig 2b



1
2
3


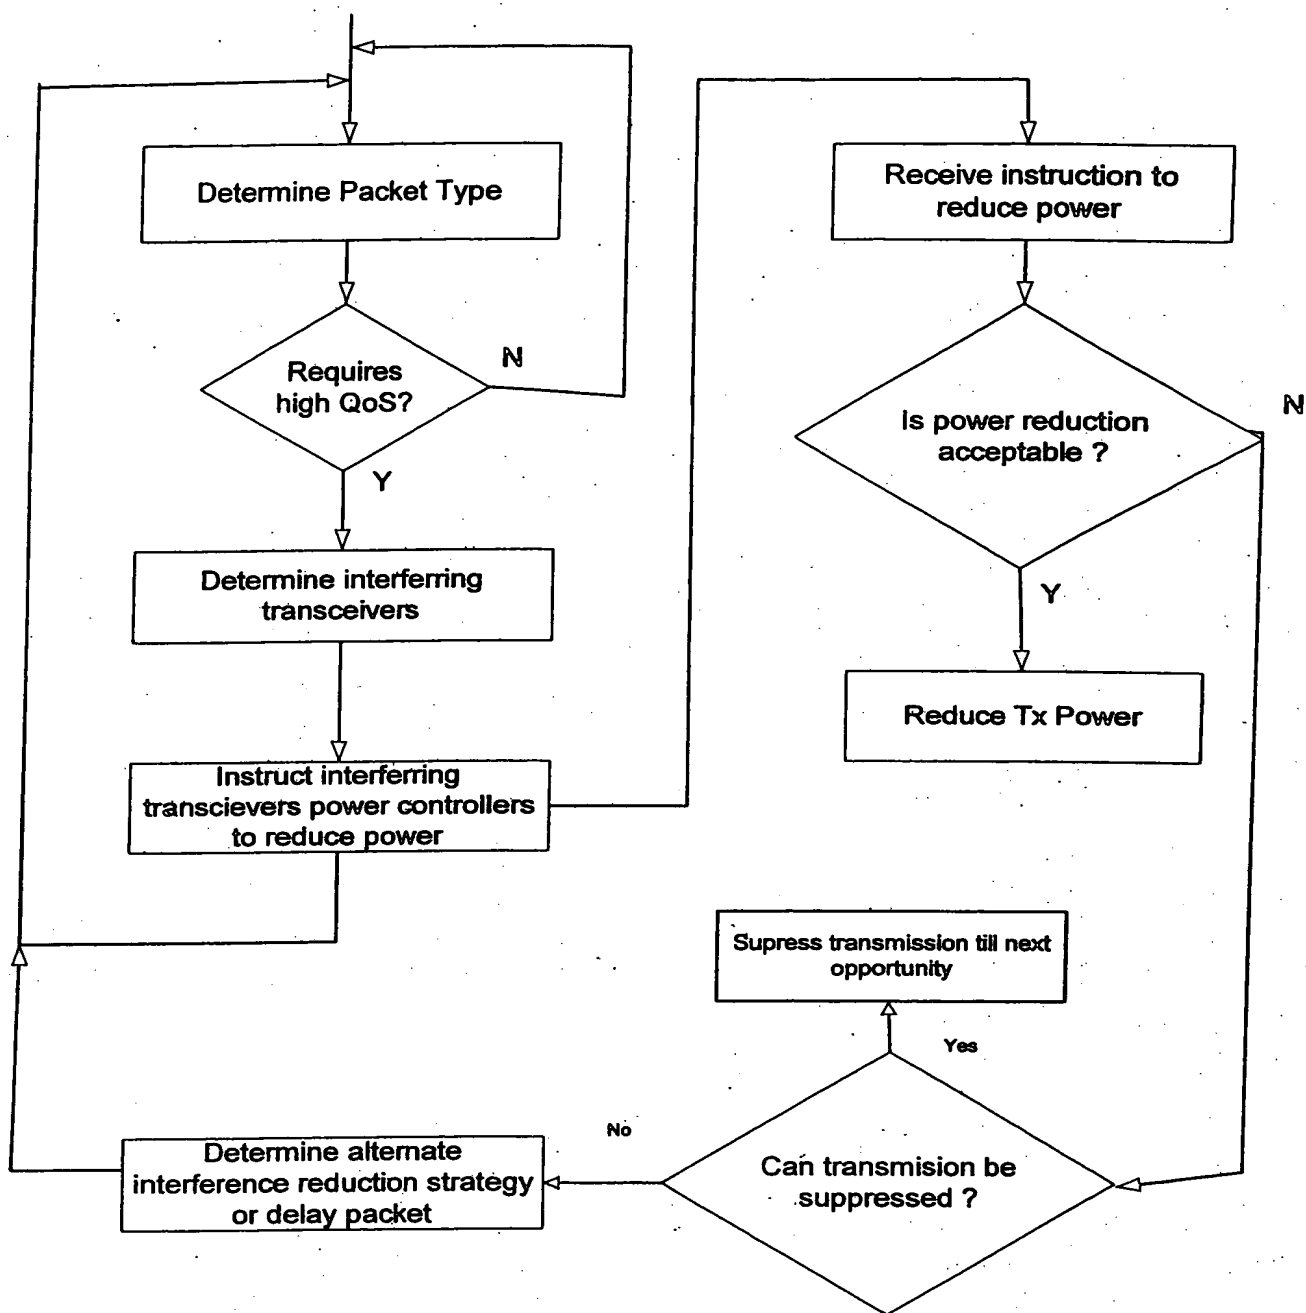


Fig 3



1
2
3



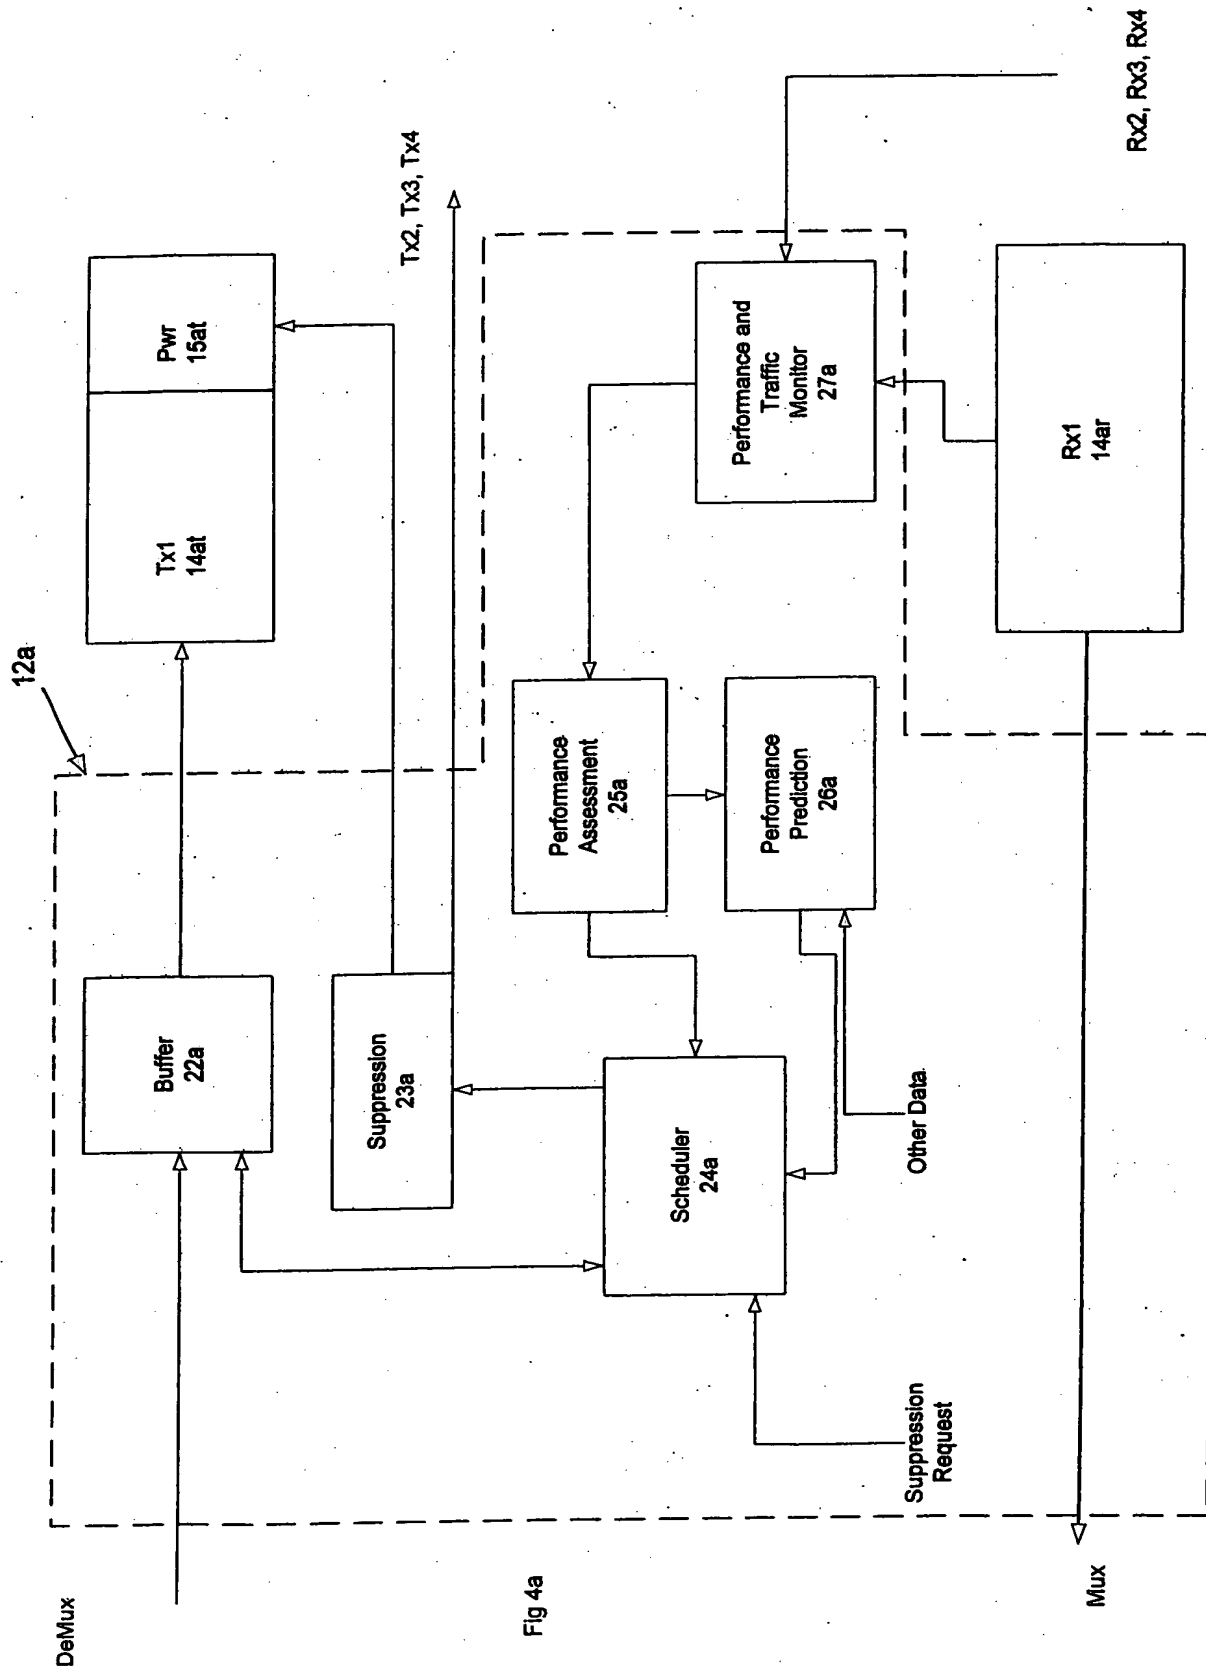

1
2
3

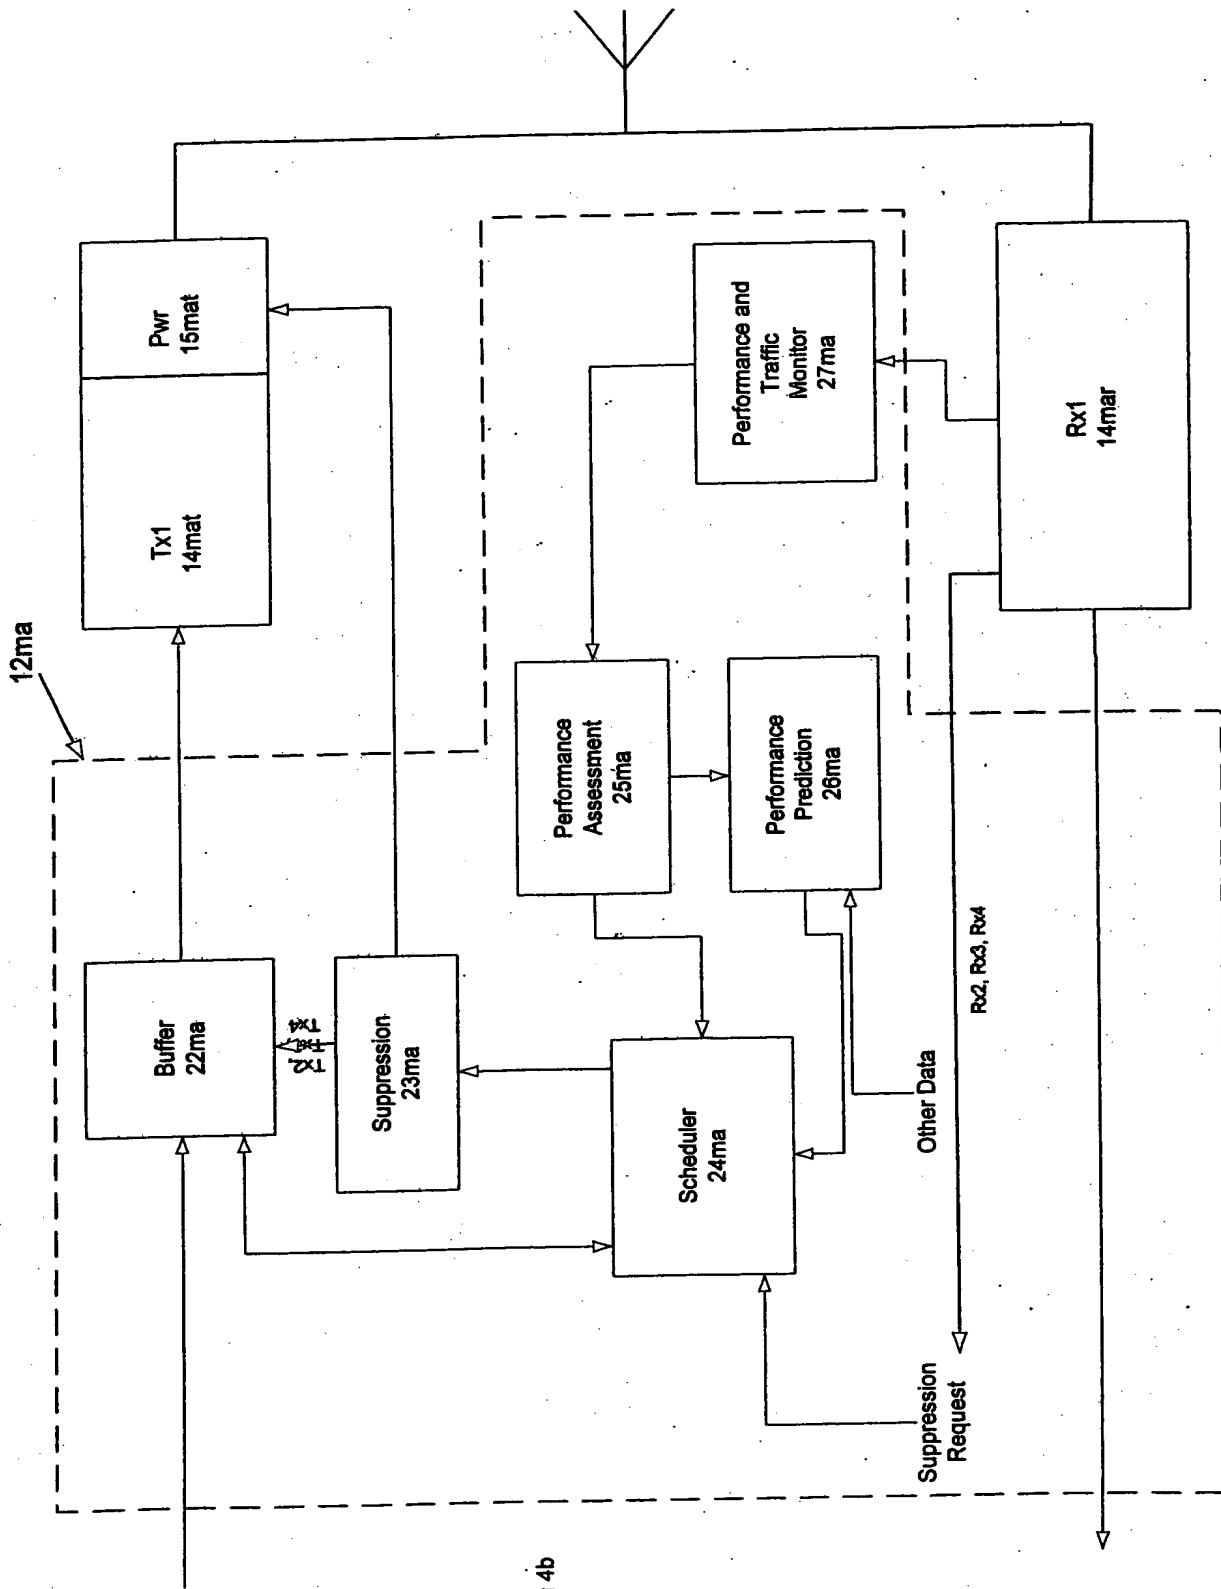


Fig 4b



1
2
3

Downlink Throughput and Packet Failure Rate

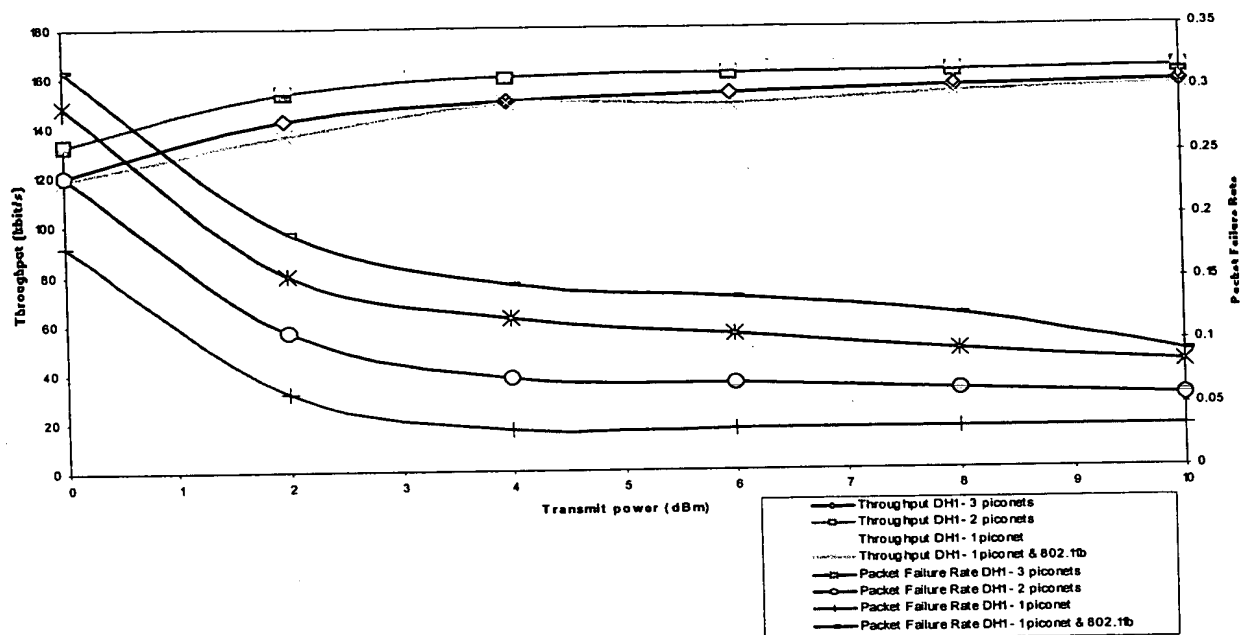


Fig 5

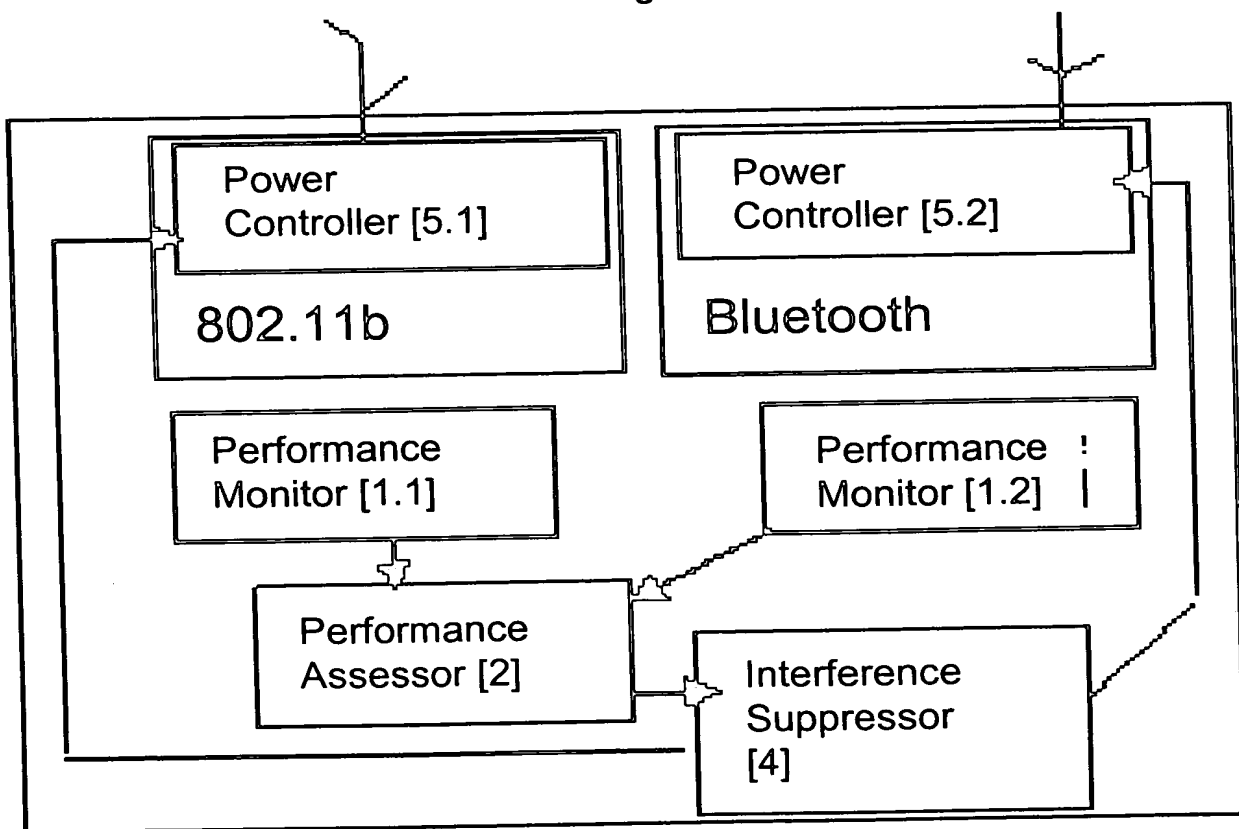


Fig 7



1
2
3

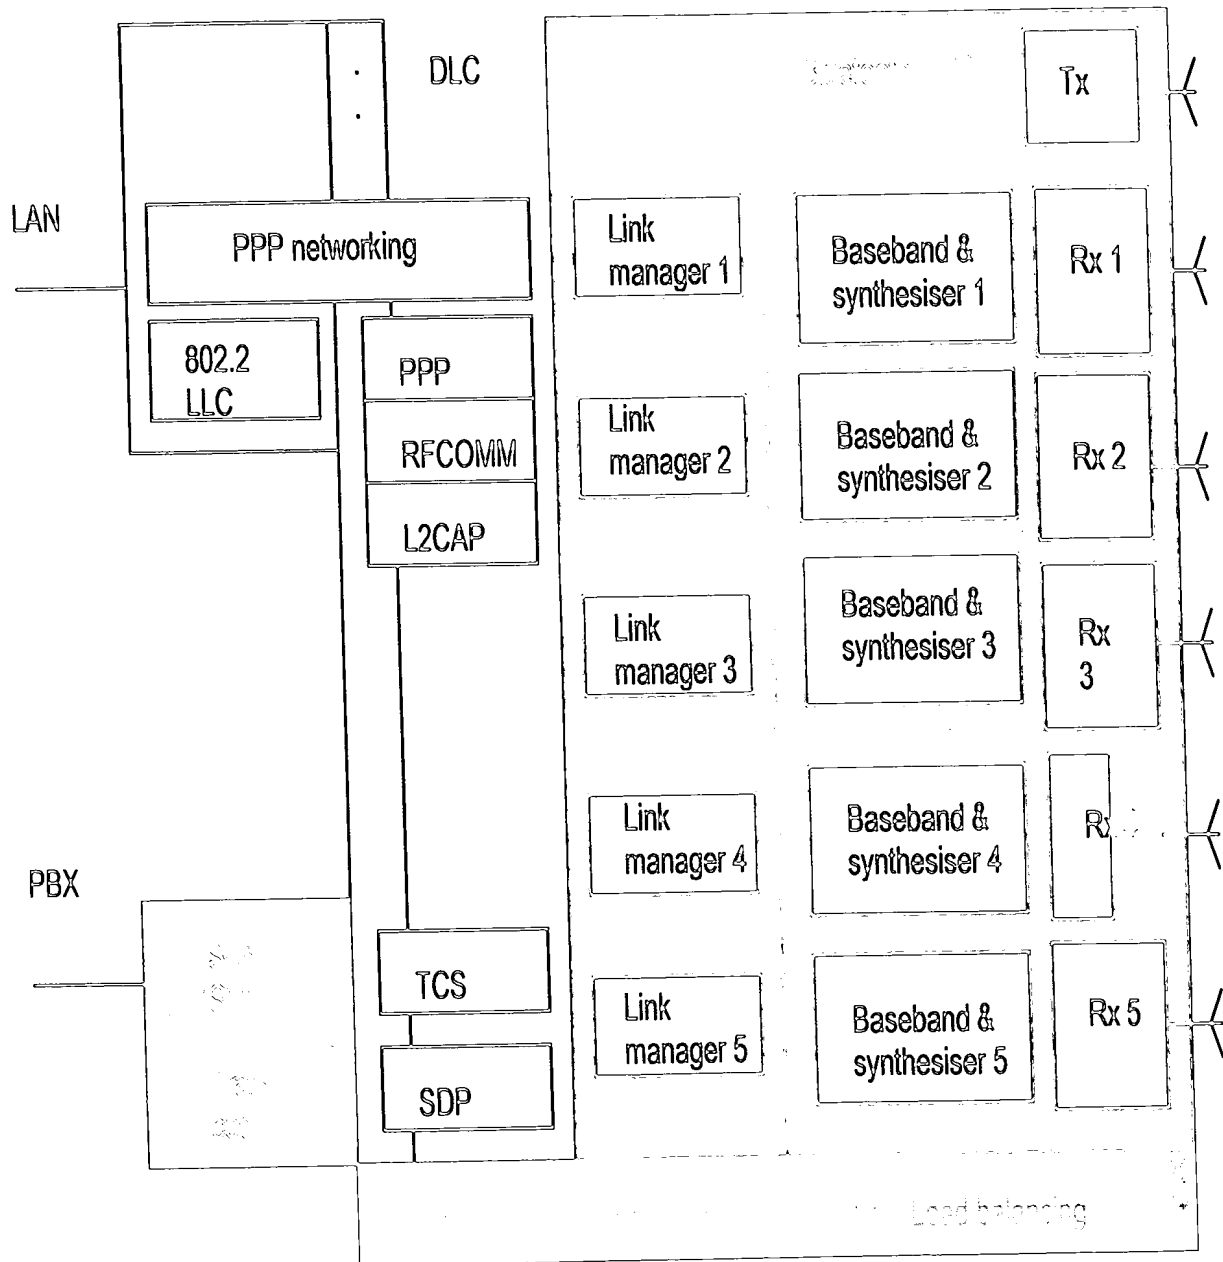


Fig 6

Customer Number

22850

703-413-3000

SERIAL NO.: 101777, 185

INSTALLING DATE: February 13, 2004